
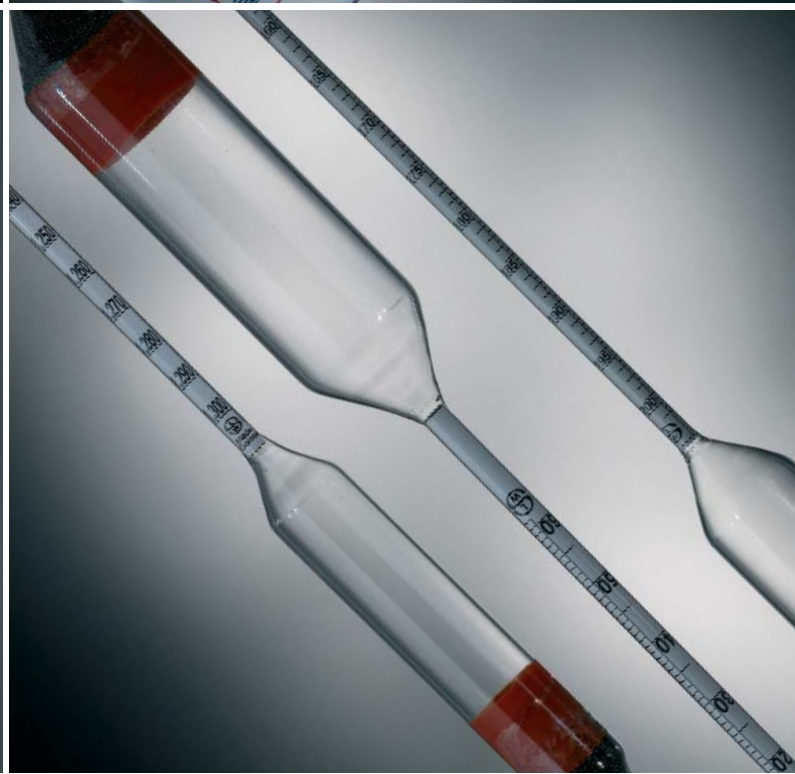


# Providing Industry with 'turn key' solutions - worldwide

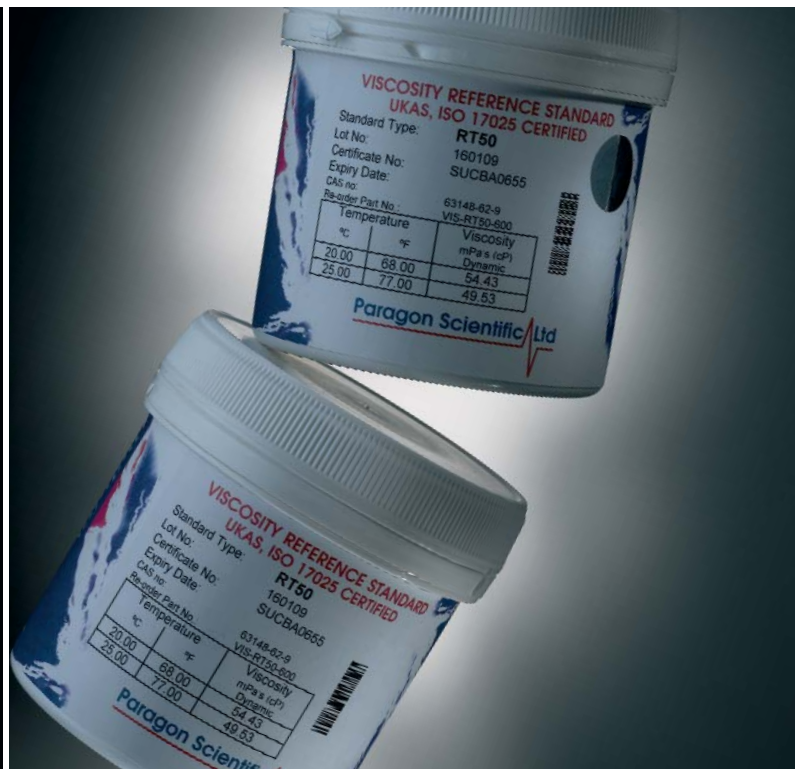

# Our Accreditations

The United Kingdom Accreditation Service (UKAS) is the only body recognised by the UK Government certification and conformity to international agreed standards for testing, calibration and inspection.

UKAS accreditation denotes competence for customers to make an informed and confident choice in the procurement process.

The UKAS mark ensures buyers have peace of mind.

UKAS also bridges international barriers, making trade easier, especially in new growth markets.

## International Recognition

ISO 17025 is recognised, internationally for competence to carry out testing and or calibrations to the standard dictated by international methods. This requires accredited facilities to comply with all the requirements detailed within the varied sections of the standard.



These include: assuring test quality, calibration results, environmental conditions and purchasing. ISO 17025 is applicable to laboratories operating in a multitude of business sectors, including automotive, cosmetics, micro-electronics, pharmaceutical, petro chemical and power generation.



## ISO Guide 34

In addition to ISO 17025, the highest level of quality assurance is achieved through ISO 17025 / ISO Guide 34. This confirms the expertise of the manufacturer, the integrity of the production systems and the reliability of the Certified Reference Materials produced.



0649



4589

|   |   |
|---|---|
|  | <b>Agence Nord :</b><br>Plug N'Work - Campus Effiscience<br>2 Rue Jean Perrin - Bât D<br>14460 Colombelles<br>Tél: 02.31.34.50.74 Fax: 02.31.34.55.17         |
|   | <b>Agence Sud :</b><br>Hôtel d'Entreprises de La Croix Rouge - Lot A4<br>10 Av de la Croix Rouge - 84000 Avignon<br>Tél : 04.90.27.17.95 Fax : 04.90.27.17.52 |
| <b>www.detalabo.fr</b>  |   |

## ASTM D 93 Pensky Marten Closed Cup Flash Point

Certified Reference Material (CRM).

- Certified Reference Material for annual verification checks in accordance with ASTM D 93
- Certified in accordance with our UKAS accreditation to ISO 17025 / ISO Guide 34 by means of a method specific inter laboratory study
- Packaged in 3 x 80mL bottles - 'One shot', one bottle per test ensures zero contamination/high-end volatile loss
- Fully traceable to international standards
- Supplied with MSDS
- Tamper evident security packaging
- 1 year shelf life
- Manufactured in the United Kingdom

### ASTM D 93 Pensky-Martens Closed Cup Flash Point (Primary)

| Product Code  | Test Method | Product Nature | Certified Value | Pack Size |
|---------------|-------------|----------------|-----------------|-----------|
| CRM-PMCC-Low  | ASTM D 93   | Mineral Oil    | 77.0°C          | 3 x 80mL  |
| CRM-PMCC-Mid  | ASTM D 93   | Mineral Oil    | 141.0°C         | 3 x 80mL  |
| CRM-PMCC-High | ASTM D 93   | Mineral Oil    | 230.0°C         | 3 x 80mL  |

Please check website for up-to-date information



## Flash Point Standards

| Product Code  | Test Method           | Product Nature    | Certified Value | Pack Size |
|---------------|-----------------------|-------------------|-----------------|-----------|
| CRM-COC-Low   | COC ASTM D 92         | Mineral Oil       | 85.0°C          | 3 x 80mL  |
| CRM-COC-Mid   | COC ASTM D 92         | Mineral Oil       | 153.0°C         | 3 x 80mL  |
| CRM-COC-High  | COC ASTM D 92         | Mineral Oil       | 262.0°C         | 3 x 80mL  |
| CRM-PMCC-Low  | PMCC ASTM D 93 Proc A | Mineral Oil       | 77.5°C          | 3 x 80mL  |
| CRM-PMCC-Mid  | PMCC ASTM D 93 Proc A | Mineral Oil       | 141.0°C         | 3 x 80mL  |
| CRM-PMCC-High | PMCC ASTM D 93 Proc A | Mineral Oil       | 228.0°C         | 3 x 80mL  |
| CRM-ABKR      | Abel IP 170           | Jet Aviation Fuel | 41.9°C          | 250mL     |
| CRM-FCLU      | COC ASTM D 92         | Lubricant         | 265°C           | 250mL     |
| CRM-PMGO      | PMCC ASTM D 93 Proc A | Diesel            | 58.2°C          | 250mL     |
| CRM-PMLU      | PMCC ASTM D 93 Proc B | Lubricant         | 203°C           | 250mL     |
| CRM-TAKR      | TAG ASTM D56          | Jet Aviation Fuel | 43.1°C          | 250mL     |

*All values stated are nominal - 10/07/2011*