Benefits

- Automatic dispensing of small volumes
- Constant delivery of fluids
- Hands free operation
- Better flow performance

Features

- Accuracy ±0.35%
- Holds one or two syringes from 0.5 μ l to 140 ml
- High resolution color touch screen
- Real time clock
- · Unparalleled ease of use
- Touch pad "lock" feature
- LED light on front panel
- Full metal chassis
- Built in syringe table
- Up to 75 lbs linear force
- Advanced microstepping techniques
- · Built in RS-485 interface to link multiple pumps
- USB port & RS232 Interface
- I/O & TTL interface
- Continuous mode of operation
- Protection with a spill dam
- Analog control option
- CE, UL, CSA, CB Scheme, **EU RoHS**

Applications

- Microfluidics
- Drug Discovery
- Nanofluidics
- Polymer Research
- HPLC Mass Spec
- · Organic Synthesis
- Electrospinning
- Reactor Injections

Markets

- Pharmaceutical
- Biotech
- Chemical
- Neuroscience
- Research and Development
- Government
- Petrochemical
- Food and Beverage

KDS Legato[™] 200 Infuse Only Syringe Pump



The NEW KDS Legato™ 200 series is the next generation of syringe pumps

The KDS Legato 200 Infuse only syringe pump offers unparalleled ease of use through the high resolution touch screen. The basic model works with one syringe or two and can be reconfigured in the field to be used with multiple syringes. The full touch screen interface enables the user to quickly create configurations and recall them for easy use. The 4.3" TFT color display with touch pad interface presents all the pump operating parameters on one easy to view run screen. Protective cover over the display prevents leakage into the display. To optimize your bench space the Legato 200 can be placed on it's side to reduce the footprint by 4 times. The footprint is only 3.5 x 9.75 in. the display also tilts with the change to allow the user to operate the pump vertically.

The Legato 200 is an infuse only syringe pump. It accommodates 2 syringes from 0.5 µl to 140 ml. User definable flow rates with selectable target volumes or time values to control the total infusion volume. An led light on the front panel makes it easy to see if the pump is running. The programmable model offers maximum flexibility for configuring and running different programs. Up to 40 programs of 20 steps each can be

configured and stored in the unit and recalled quickly with the touch of a button.

The pumps are versatile and can be connected through the RS-485 interface Advanced microstepping techniques are employed to further reduce the step angle to eliminate flow pulsation. The accuracy is $\pm 0.35\%$ A wide dynamic flow range from 5 pl/min to 215.803 ml/min can be programmed into the pump. Add the New Adagio software to maximize the use of the pumps functions and features. Adagio allows you to configure the pump through the software as well as operate one or multiple pumps.


KD Scientific pumps are acknowledged as the industry's highest values solution for delivering precise and smooth flow. KD Scientific is recognized worldwide for quality and reliability at an economical price and has the broadest line of syringe pumps to meet your specific application. KD scientific is committed to delivering the highest level of customer satisfaction, as well as technical support for all their products.

NOTE: KD Scientific syringe pumps are for laboratory use only.



Intuitive Run Screen

Combining multiple parameters simultaneously with internationally recognizable icons allow the Legato" Series to provide a new level of intuitive syringe pump operation.

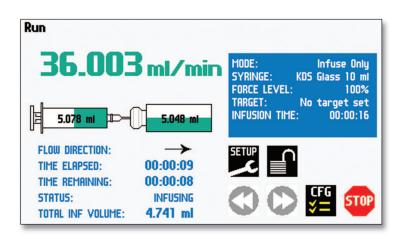

Specifications

| Model | KDS Legato 200 | | |
|--|---|--|--|
| Syringe Size | 0.5 μl to 140 ml | | |
| Power | 100-240 VAC: 50/60 Hz, 50 W. 0.5 A fuse | | |
| Motor Drive Control | Microprocessor with 1/16 microstepping | | |
| Linear Force (Maximum) | 34 kg (75 lbs) @ 100% force selection | | |
| Number of Microsteps per One Revolution of Lead Screw | 6400 | | |
| Step rate (Minimum) | 27.5 sec/µstep | | |
| Step rate (Maximum) | 26 µsec/µstep | | |
| Drive Motor | 1.8 degree Stepper Motor | | |
| Pusher Travel Rate - (Minimum) | 0.36 μm/min | | |
| Pusher Travel Rate - (Maximum) | 190.80 mm/min | | |
| Flow Rate (Minimum) | 5 pl/min (0.5 μl syringe) | | |
| Flow Rate (Maximum) | 215.803 ml/min (140 ml syringe) | | |
| Dimensions | 8.89 x 25.4 x 27.94 cm (3.5 x 10 x 11 in) | | |
| Weight | 4.9 kg (10.75 lb) | | |
| RS-232 - 9 Pin D-Sub Connector, RS485 - IEEE-1394 6 pos, USB - Type B, I/O & TTL - 15 Pin D-Sub Connector | | | |

Flow Rates

| Syringe | Diameter | Minimum | Maximum |
|---------|-----------|-----------------|----------------|
| 0.5 μΙ | 0.103 mm | 3.12 pl/min | 1.589 μl/min |
| 1 μΙ | 0.146 mm | 6.18 pl/min | 3.180 μl/min |
| 2 μΙ | 0.206 mm | 12.301 pl/min | 6.358 μl/min |
| 5 µl | 0.343 mm | 33.96 pl/min | 17.630 μl/min |
| 10 μΙ | 0.485 mm | 67.72 pl/min | 35.249 μl/min |
| 25 μΙ | 0.729 mm | 153.42 pl/min | 79.640 μl/min |
| 50 μl | 1.03 mm | 306.24 pl/min | 158.984 μl/min |
| 100 μΙ | 1.457 mm | 612.72 pl/min | 318.126 μl/min |
| 250 μΙ | 2.304 mm | 1.533 nl/ min | 795.51 μl/min |
| 500 μl | 3.256 mm | 3.06 nl/min | 1.588 ml/min |
| 1000 μΙ | 4.608 mm | 6.129 nl/min | 3.181 ml/min |
| 1 ml | 4.699 mm | 6.373 nl/min | 3.308 ml/min |
| 3 ml | 8.585 mm | 21.272 nl/min | 11.044 ml/min |
| 5 ml | 11.989 mm | 41.485 nl/min | 21.539 ml/min |
| 10 ml | 14.427 mm | 60.073 nl/min | 31.19 ml/min |
| 20 ml | 19.05 mm | 104.74 nl/min | 54.383 ml/min |
| 30 ml | 21.59 mm | 134.533 nl/min | 69.852 ml/min |
| 50 ml | 26.594 mm | 204.122 nl/ min | 105.985 ml/min |
| 100 ml | 35.7 mm | 367.839 nl/min | 190.992 ml/min |
| 140 ml | 38.4 mm | 415.623 nl/min | 215.803 ml/min |

Modular Syringe Racks

Racks can be purchased to create a multichannel syringe pump.



Small Syringe Multi-Rack Option (78-8300)

- Infuse/Withdraw 6/10 Multi-Rack
- Six 30 to 60 ml plastic syringes or ten 0.5 µl to 20 ml syringes
- Can be sold for Infuse Only as well



Large Syringe Multi-Rack

Option (78-8301)

- Infuse/Withdraw 4 x 140 Multi-Rack
- Four 60 to 140 ml syringes
- · Can be sold for Infuse Only as well



Microliter Syringe Multi-Rack

Option (78-8302)

- Infuse/Withdraw Microliter Rack
- Four 0.5 ul to 10 ml syringes
- •Can be sold for Infuse Only as well

Agence Nord:

ZA Object'Ifs Sud - Lot A3 6 Allée Emilie du Châtelet 14123 Ifs

Bât Le Venango. 392 Rue Jean Dausset

tél : 04.90.27.17.95 fax : 04.90.27.17.52

tél: 02.31.34.50.74 fax: 02.31.34.55.17

AGROPARC - BP11575

84916 Avignon Cédex 9

Agence Sud:



Agence Est:

Parc Club des Tanneries 2 Rue de la Faisanderie 67380 Lingolsheim tél: 03.88.04.01.81 fax: 03.68.93.01.52

www.deltalabo.fr info@deltalabo.fr 84 October Hill Road • Holliston, MA 01746

508.429.6809

fax 508.893.0160

Rev A